

INSTALLATION INSTRUCTIONS

DILLINGER GRIPS FOR H-D CABLE THROTTLE, SATIN BLACK

6673

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Clutch Side Grip
- 1 Throttle Side Grip

YOU WILL ALSO NEED:

Set of Torx Wrenches, Set of Hex Wrenches, Combination Wrenches, Utility Knife, 80-100 Grit Sandpaper, Adhesive Solvent

NOTICE THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

THROTTLE SIDE PROCEDURE

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.

WARNING A FACTORY SERVICE MANUAL WILL BE HELPFUL IN PERFORMING THIS INSTALLATION. DO NOT ATTEMPT TO PERFORM THIS INSTALLATION IF YOU ARE NOT CONFIDENT IN YOUR ABILITY TO COMPLETE ALL OF THE STEPS IN THE PROCEDURE; CONSULT A TRAINED TECHNICIAN. IMPROPER INSTALLATION COULD RESULT IN SERIOUS INJURY OR DEATH.

STEP 2 Refer to PIC 1. Roll or slide the rubber throttle cable adjustment covers to gain access to the adjusters.

STEP 3 Refer to PIC 1. Loosen the jam nuts on the adjusters on both cables; turn the jam nuts and adjusters until the throttle control is at its loosest point.



Note: Refer to your service manual for additional information on the following Steps.

STEP 4 Separate the switch housing by removing the hardware located on the top and bottom of it. Set hardware aside, it will be reused.

Note: You may also have to loosen the master cylinder clamp to allow the switch housing halves to separate.

STEP 5 Refer to PIC 2. Lift up on the rear cable where it fits into the throttle sleeve; this will provide enough slack in the cable to remove the cable end and brass ferrule from the throttle sleeve. Be careful not to lose the brass ferrules; they are not permanently attached to the cables.

STEP 6 Repeat Step 5 for the other cable.

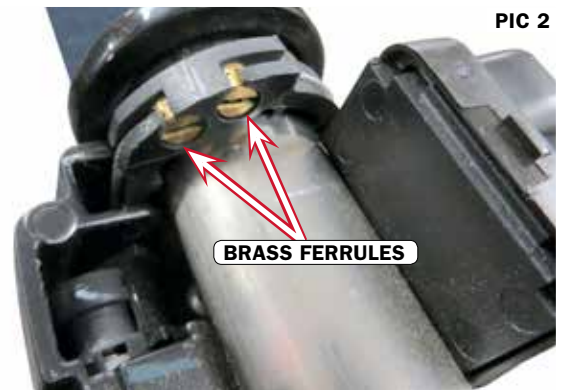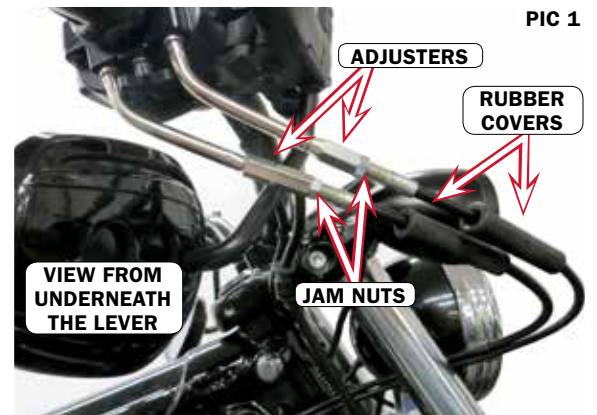

INSTALLATION INSTRUCTIONS

DILLINGER GRIPS FOR H-D CABLE THROTTLE, SATIN BLACK

6673

-CONTINUED-

NOTICE ENSURE THAT THE THROTTLE CABLES HAVE BEEN PROPERLY LUBRICATED AND DO NOT SHOW SIGNS OF WEAR BEFORE REASSEMBLY.

STEP 7 Slide the stock grip/throttle sleeve assembly off the handlebar. Set it aside; it will not be reused.

STEP 8 Slide the new Throttle Grip onto the handlebar. Install the throttle cables in the reverse order they were removed in Steps 5 and 6.

STEP 9 Reassemble the switch housing halves and secure them with the hardware removed in Step 4. Tighten the screws on the master cylinder clamp if they were loosened in Step 4.

STEP 10 Adjust the throttle cables and tighten the jam nuts. Ensure proper throttle cable adjustment and throttle operation before riding the motorcycle. Refer to your model owners' manual or service manual for more information.

WARNING ROTATE THROTTLE AND CHECK THAT IT MOVES FREELY AND RETURNS TO CLOSED BEFORE STARTING BIKE. FAILURE TO PROPERLY ADJUST THE THROTTLE CABLES COULD RESULT IN LOSS OF CONTROL CAUSING SERIOUS INJURY OR DEATH.

CLUTCH SIDE PROCEDURE

NOTE: Refer to your service manual for additional information on the following Steps.

STEP 11 Separate the switch housing by removing the hardware located on the top and bottom of it. Set hardware aside, it will be reused.

Note: You may also have to loosen the clutch control clamp to allow the switch housing halves to separate.


STEP 12 Remove the clutch side grip. A sharp knife may be used to cut the grip lengthwise allowing you to "peel" the stock grip from the handlebar.

STEP 13 Sand the clutch side handlebar surface with 80-100 grit sandpaper or emery cloth to remove any previous glue or rubber residue. This provides a pristine metal surface for the new grip.

STEP 14 With an ammonia based cleaner or similar degreasing agent and a clean rag, wipe off the exposed handlebar.

STEP 15 Refer to FIG 1 and 2. With the wider side of the grip's flange positioned on the bottom, slide the grip onto the handlebar.

STEP 16 Reassemble the switch housing halves and secure them with the screws removed in Step 11. Tighten the clutch control clamp if it was loosened in Step 11.

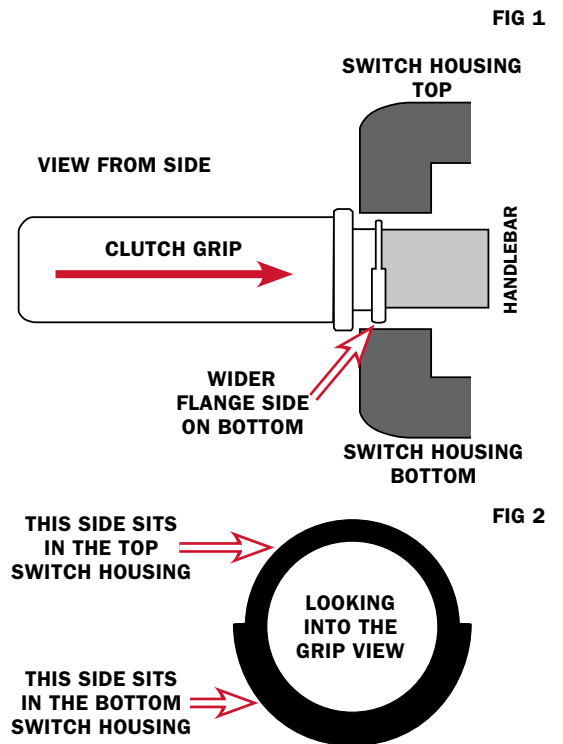

INSTALLATION INSTRUCTIONS

DILLINGER GRIPS FOR H-D CABLE THROTTLE, SATIN BLACK

6673

-CONTINUED-

NOTICE

IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PREASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at www.kuryakyn.com/legal-notice.

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at www.kuryakyn.com/legal-notice